




SIERRA
SERVICIOS DE PERFORACIÓN

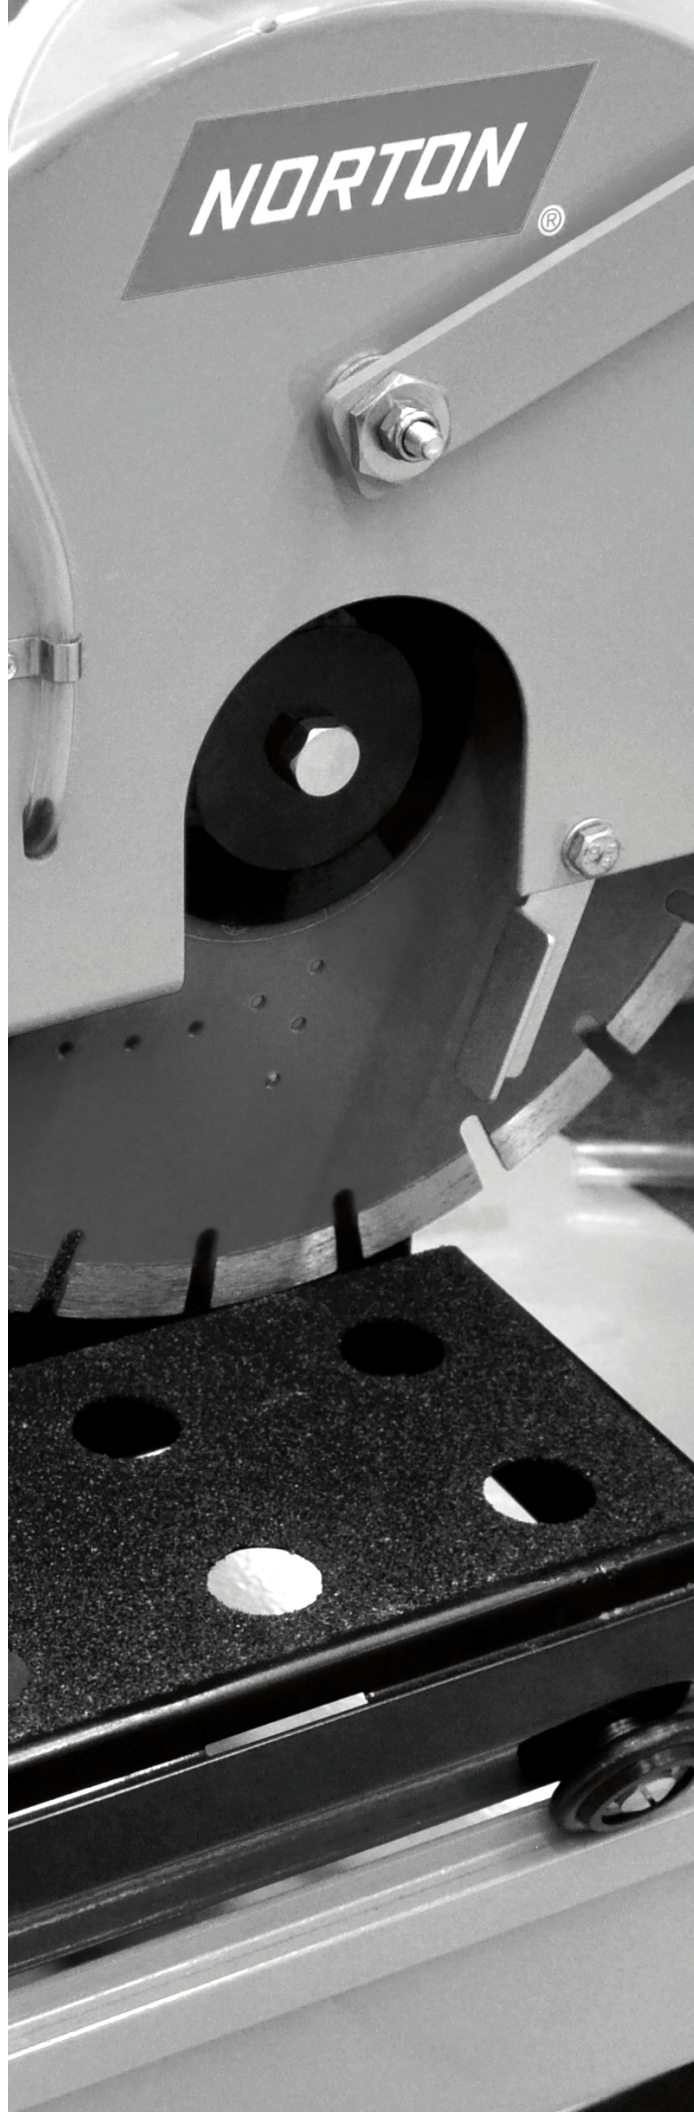

CORTADORAS Y DISCOS PARA CORTE DE NÚCLEO

CONTENIDO

CORTADORAS PARA NÚCLEO: NORTON CLIPPER	1
MODELO BBL 1347 Y BBL 547	2
ESPECIFICACIONES TÉCNICAS MODELO BBL 547	3
ESPECIFICACIONES TÉCNICAS MODELO BBL 1347	4
DISCOS DE CORTE: CARBODIAM	5
DIÁMETRO DE DISCOS Y NUCLEADORAS	6



CORTADORAS PARA NÚCLEO

NORTON Clipper ofrece una amplia gama de maquinaria para el **corte** de múltiples materiales ideal para los profesionales de la minería y construcción.

Es la **marca líder** en la industria, proporcionando **durabilidad, velocidad** y fiabilidad de **calidad** superior.



Los diseños de las máquinas son de alto rendimiento, modernos, verátiles y adecuados para cortar una amplia variedad de materiales, ya sean pequeños o medianos.





En la **minería**, esta cortadora es ideal y adecuada para el **corte de núcleo** en origen o en ubicaciones remotas.

MODELO BBL 547

MOTOR ELÉCTRICO

MODELO BBL 1347

MOTOR A GASOLINA

Motor GX390 Honda de 13 HP con filtro de aire ciclónico y eje intermedio que mejora la potencia.



El pedal y el volante ultrafuertes para ajustes de profundidad exactos hacen que el BBL sea adecuado para cualquier necesidad de corte.

MODELO BBL 547

MOTOR ELÉCTRICO



TECHNICAL SPECIFICATIONS

PRODUCT #	BBL547
UPC – Single	70184683211
UPC – 3 Phase	70184683334
Blade Guard Capacity – in. (mm)	14" (355)
Maximum Depth of Cut – in. (mm)	5" (127)
Arbor Size – in. (mm)	1" (25)
Blade Flange Diameter – in. (mm)	4" (107)
Blade Shaft RPM	2,900
Blade Shaft Bearings	1" Heavy Duty Flange
Blade Shaft Drive	2 Belt
Blade Guard Attachment	All Steel, Stay Level
Conveyor Cart	All steel cart, tilt-lock cart wheels, anti-skid surface, measuring rule; 45°/90° cutting guide
Frame	Heavy-duty, jig-welded steel frame. Open construction for larger materials. Adjustable foot pedal and head height control.
Water Pump	Electric – all electric saws have an electrical water pump
Power Source	Electric
Motor/Engine Type	Baldor
Specifications	T.E.F.C. Thermal Protection
Net Horsepower*	5 HP (3.7 kW)
Voltage	208-230 volts
3 PH – Voltage	230/460 volts
Cycle*/Current/Phase	60Hz/AC/1
3 PH – Cycle/Current/Phase	60Hz/AC/3
Full Load Amps*	20.6 Amp
Starter	Capacitor
Motor/Engine Cooling	Air
Saw Length – in. (mm)	60" (1,524)
Saw Width – in. (mm)	26" (660)
Saw Height – in. (mm)	54" (1,372)
Maximum Arbor Height Over Table – in. (mm)	30" (762)
Cart Length – in. (mm)	16-1/2" (418.5)
Cart Width – in. (mm)	23" (584)
Pan Length – in. (mm)	43-1/8" (1,095)
Pan Width – in. (mm)	22-7/16" (569)
Weight Crated – lbs (kg)	475 (216)
Weight Uncrated – lbs (kg)	440 (199.5)
575 VOLT AND 600 VOLT, 3-PHASE OPTIONS AVAILABLE. ASK CUSTOMER SERVICE FOR MORE DETAILS	



Bomba de Agua Eléctrica



Reemplazo del carro transportador

ACCESSORIES	UPC	SMART PART #
Electric Water Pump - PE-1	70184668392	214169
Conveyor Cart Replacement	00310007390	083777
* = DATA PROVIDED BY MOTOR/ENGINE MANUFACTURER GENUINE NORTON CLIPPER DIAMOND BLADE INCLUDED WITH SAW.		



MODELO BBL 1347

MOTOR A GASOLINA



TECHNICAL SPECIFICATIONS

PRODUCT #	BBL1347
UPC – Single	7018463214
UPC – 3 Phase	NA
Blade Guard Capacity – in. (mm)	14" (355)
Maximum Depth of Cut – in. (mm)	5" (127)
Arbor Size – in. (mm)	1" (25)
Blade Flange Diameter – in. (mm)	4" (107)
Blade Shaft RPM	2,900
Blade Shaft Bearings	1" Heavy Duty Flange
Blade Shaft Drive	2 Belt
Blade Guard Attachment	All Steel, Stay Level
Conveyor Cart	All steel cart, tilt-lock cart wheels, anti-skid surface, measuring rule; 45°/90° cutting guide
Frame	Heavy-duty, jig-welded steel frame. Open construction for larger materials. Adjustable foot pedal and head height control.
Water Pump	Mechanically Belt Driven
Power Source	Gasoline, Single Cylinder 4 Cycle
Motor/Engine Type	Honda, GX390
Specifications	GX390K1QXC9
Net Horsepower*	11 HP (8.2 kW)
Voltage	NA
3 PH – Voltage	NA
Cycle*/Current/Phase	NA
3 PH – Cycle/Current/Phase	NA
Full Load Amps*	NA
Starter	Recoil
Motor/Engine Cooling	Air



Ensamblaje de bomba mecánica de agua



Reemplazo del carro transportador

ACCESSORIES	UPC	SMART PART #
BBL Mechanical Water Pump Assembly (pulley not included)	00310004436	073279
BBL Water Pump Pulley	00310004883	076552
Conveyor Cart Replacement	00310007390	083777
** DATA PROVIDED BY MOTOR/ENGINE MANUFACTURER		
GENUINE NORTON CLIPPER DIAMOND BLADE INCLUDED WITH SAW.		



SAW DIMENSIONS

Saw Length – in. (mm)	60" (1,524)
Saw Width – in. (mm)	26" (660)
Saw Height – in. (mm)	57" (1,448)
Maximum Arbor Height Over Table – in. (mm)	30" (762)
Cart Length – in. (mm)	16-1/2" (418.5)
Cart Width – in. (mm)	23" (584)
Pan Length – in. (mm)	43-1/8" (1,095)
Pan Width – in. (mm)	22-7/16" (569)
Weight Crated – lbs (kg)	475 (216)
Weight Uncrated – lbs (kg)	440 (199.5)
575 VOLT AND 600 VOLT, 3-PHASE OPTIONS AVAILABLE.	
ASK CUSTOMER SERVICE FOR MORE DETAILS	




DISCOS DE CORTE Y NUCLEADORAS

Carbodium brinda una gran variedad de **discos diamantados** para cortadoras con motor eléctrico y a gasolina.



DISCO SEGMENTADO

DISCOS DE CORTE

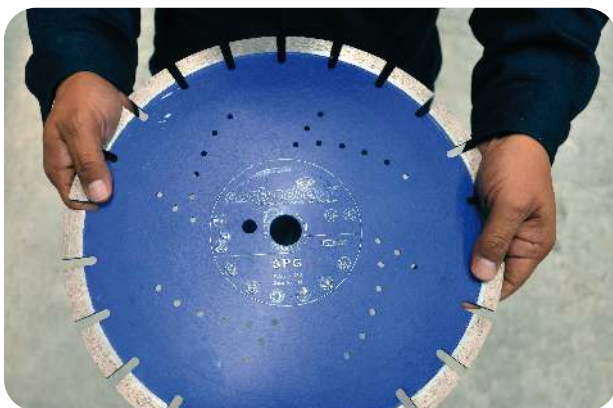

DISCO CONTINUO

DISCOS DE CORTE



DISEÑO DE DISCOS

Disco de Rin Segmentado

Disco de Rin Continuo

DIÁMETROS DE DISCOS QUE SE COMERCIALIZAN:

4,5"	Segmentado
7"	Segmentado
9"	Segmentado y Continuo
10"	Continuo
12"	Segmentado y Continuo
14"	Segmentado y Continuo
24"	Segmentado
36"	Segmentado



NUCLEADORAS

DIÁMETROS DE NUCLEADORAS QUE SE COMERCIALIZAN:



2"	Diámetro interior
4"	Diámetro interior
6"	Diámetro interior
8"	Diámetro interior
10"	Diámetro interior
12"	Diámetro interior



SIERRA

SERVICIOS DE PERFORACIÓN

📍 QUERÉTARO

AV. HÉRCULES NO. 401-A, BODEGA 16
POLÍGONO EMPRESARIAL SANTA ROSA JÁUREGUI
C.P. 76220 QUERÉTARO, QUERÉTARO

442 217 7152

📞 442 248 4033

442 210 3564

📍 HERMOSILLO

BLVD. GARCÍA MORALES NO. 200
BODEGA 8, COLONIA EL LLANO
C.P. 83219 HERMOSILLO, SONORA

662 216 0715

📞 662 218 9785



ventassp@sierrasp.com.mx



Sierra Servicios de Perforación



www.sierrasp.com.mx